

# t2400 SERIES

## ARC SPRING COUPLING




### DESCRIPTION

The t2400 is an arc spring coupling especially designed for deployment in test beds. It works like a dual mass flywheel. Because of its modular spring design, it is possible to tailor its stiffness behavior to the unit under test.

### NAMING

The product is named according to the following convention:

**t2400-tttt-cccc-CVxx**

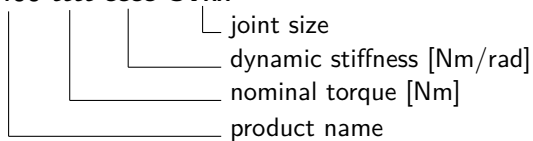

Example: t2400-2000-2500-CV30

### OPERATING RANGE

Torque: up to 2000 Nm  
Speed: up to 5000 rpm

### BENEFITS

- suitable for high dynamic loads
- high damping and long lifetime
- stiffness adjusted by spring placement
- wide stiffness range

### FUNCTION

As for a vehicle dual mass flywheel, the test bed dual mass flywheel boasts exceptional damping behavior.

Stiffness adjustment is achieved by using different spring configurations in the arc spring coupling. The standard t2400 specifications cover a nominal torque range of 1500 - 2000 Nm for a torsional stiffness of 1800 - 2500 Nm/rad.



Exclusive Representative in Japan

 TOKYO PLANT Co., Ltd.  
東京プラント株式会社

515-5 Miyazawa-cho, Akishima city, Tokyo, Japan 196-0024  
TEL: +81-42-546-6500 FAX: +81-42-546-6600  
Email: sales@tokyo-plant.co.jp

# t2400 SERIES


## ARC SPRING COUPLING

Coupling	Joint	$T_{KN}$ [Nm]	$C_{Tdyn}$ [Nm/rad]	$T_{Kmax}$ [Nm]	$n_{max}$ [rpm]	$m$ [kg]	$x_s$ [mm]	$J_1$ [kgm <sup>2</sup> ]	$J_2$ [kgm <sup>2</sup> ]	$\Psi$ [-]	$d$ [Nms/rad]	$\varphi_{max}$ [°]
t2400-1500-1800	CV21	1500	1800	1800	5000	36.09	70.5	4.05E-01	4.32E-02	0.8	2.0	57
	CV30	1500	1800	1800		36.02	70.5	4.05E-01	4.40E-02			
t2400-1800-2200	CV21	1800	2200	2200		37.17	71	4.14E-01	5.10E-02			
	CV30	1800	2200	2200		37.10	71	4.14E-01	5.18E-02			
t2400-2000-2500	CV21	2000	2500	2500		37.25	71	4.15E-01	5.10E-02			
	CV30	2000	2500	2500		37.18	71	4.15E-01	5.18E-02			

$T_{KN}$  - Nominal torque<sup>1</sup>  
 $C_{Tdyn}$  - Torsional stiffness  
 $T_{Kmax}$  - Maximum torque  
 $n_{max}$  - Maximum speed

$m$  - Mass  
 $x_s$  - Center of gravity flange-side  
 $J_1$  - Inertia flange-side  
 $J_2$  - Inertia shaft-side

$\Psi$  - Relative damping  
 $d$  - Damping  
 $\varphi_{max}$  - Maximum torsional angle

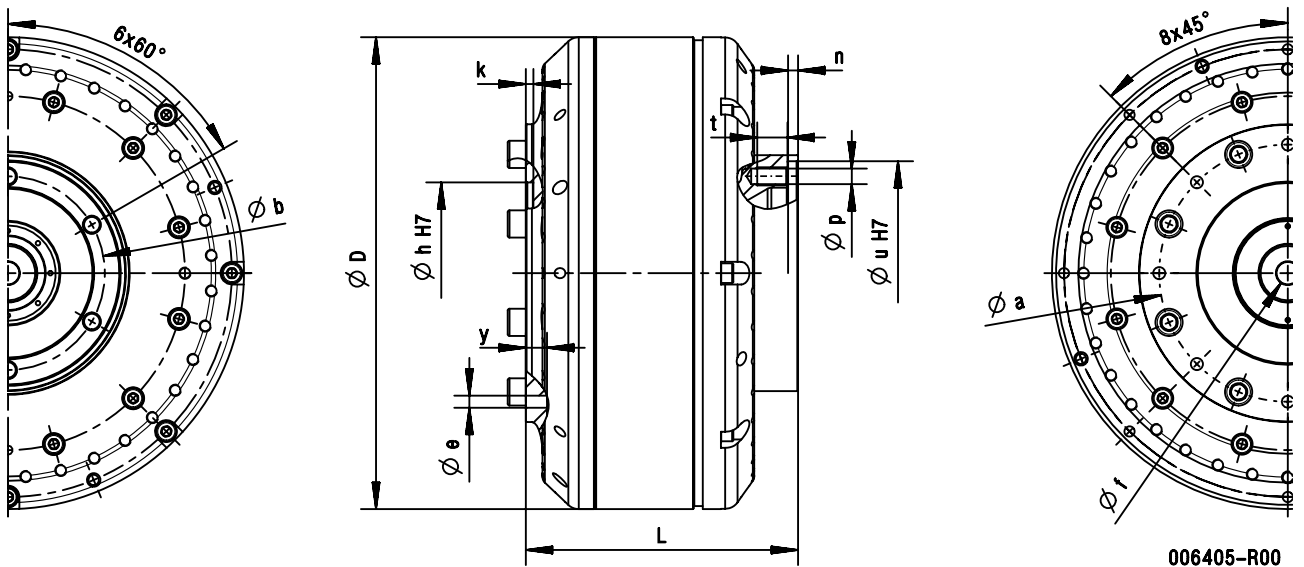

006405-R00

Coupling	Joint	D	L	a	b	e (D7)	f	h (H7)	k	n	p	t	u (H7)	y
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[-]	[mm]	[mm]	[mm]
t2400	CV21	312	180	170	108	8	15	120	5	6	M12	20	128	14
	CV30	312	180	170	128	8	15	120	5	7	M12	20	148	14

Other dimensions available on request

2018-01-18 <294856f23c3c340aedb7f9a5e0f7dd45b27b4a0d> DS EN 05

<sup>1</sup>The nominal torque must be equal to or greater than the maximum combustion engine torque